

Tiger Neo N-type

54HL4R-(V)

425-445 Watt

MONO-FACIAL MODULE


N-Type

IEC61215(2016), IEC61730(2016)

ISO9001:2015: Quality Management System

ISO14001:2015: Environment Management System

ISO45001:2018
Occupational health and safety management systems
(Made in China)

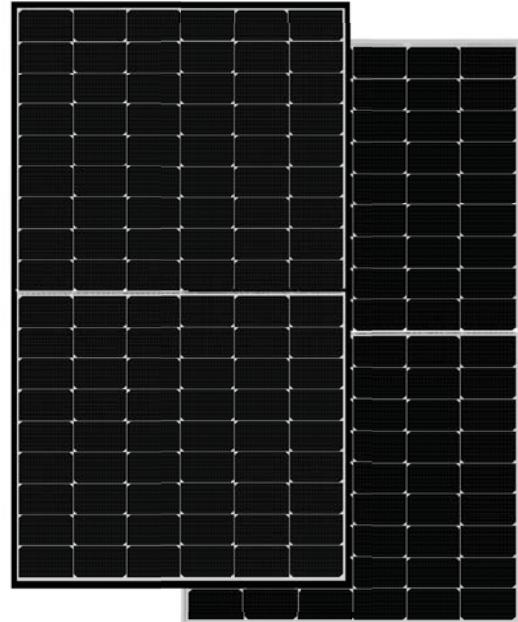


Key Features



SMBB Technology

Better light trapping and current collection to improve module power output and reliability.




Enhanced Mechanical Load

Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).



LINEAR PERFORMANCE WARRANTY

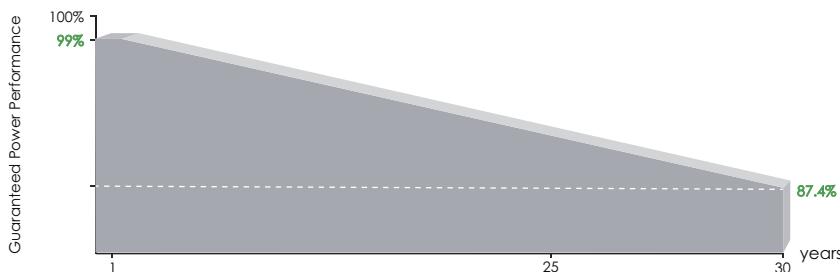


25* Year Product Warranty

30 Year Linear Power Warranty



0.40% Annual Degradation Over 30 years

*The product warranty is only applicable in Australia

Engineering Drawings

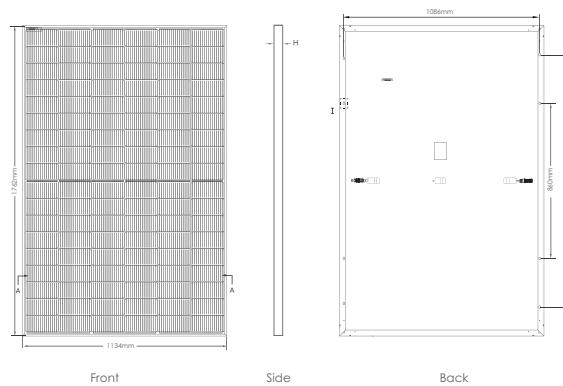

Electrical Performance & Temperature Dependence

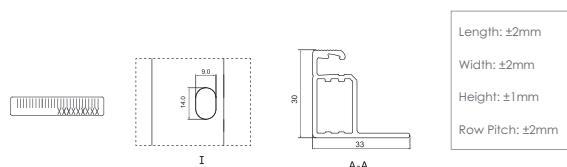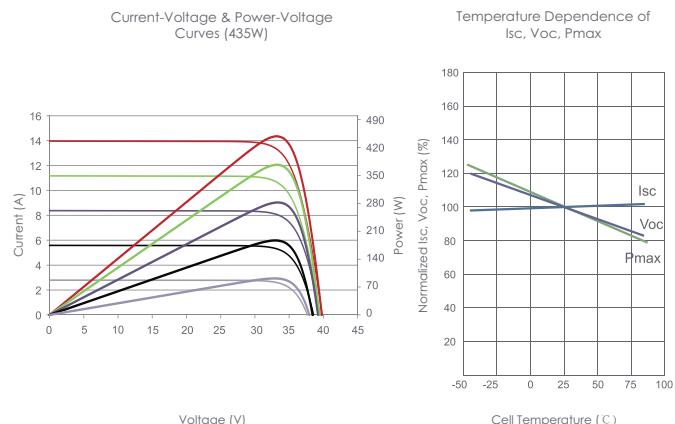

*This tolerance range applies only to the four-angle distance of the module as indicated above.

Packaging Configuration

(Two pallets = One stack)

36pcs/pallets, 72pcs/stack, 936pcs/ 40'HQ Container

Mechanical Characteristics

Cell Type	N type Mono-crystalline	
No. of cells	108 (2×54)	
Dimensions	1762×1134×30mm (69.36×44.65×1.18 inch)	
Weight	22 kg (48.50 lbs)	
Front Glass	3.2mm, Anti-Reflection Coating, High Transmission, Low Iron, Tempered Glass	
Frame	Anodized Aluminium Alloy	
Junction Box	IP68 Rated	
Output Cables	TUV 1×4.0mm ² (+): 400mm, (-): 200mm or Customized Length	
Connector Type	Staubli MC4, MC4-EVO2JK03M/1B, JK03M2/1B, Jinko PV material Staubli MC4, MC4-EVO2JK03M/2B, JK03M2/2B, Jinko PV material	
Fire Class	Class C	

SPECIFICATIONS

Module Type	JKM425N-54HL4R	JKM430N-54HL4R	JKM435N-54HL4R	JKM440N-54HL4R	JKM445N-54HL4R
	JKM425N-54HL4R-V	JKM430N-54HL4R-V	JKM435N-54HL4R-V	JKM440N-54HL4R-V	JKM445N-54HL4R-V
STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax)	425Wp	320Wp	430Wp	323Wp	435Wp
Maximum Power Voltage (VmP)	32.18V	29.99V	32.38V	30.10V	32.59V
Maximum Power Current (ImP)	13.21A	10.67A	13.28A	10.73A	13.35A
Open-circuit Voltage (Voc)	38.75V	36.81V	38.95V	37.00V	39.16V
Short-circuit Current (Isc)	13.66A	11.03A	13.73A	11.09A	13.80A
Module Efficiency STC (%)	21.27%		21.52%		21.77%
					22.02%
					22.27%
Operating Temperature(°C)				-40°C~+85°C	
Maximum system voltage				1000/1500VDC (IEC)	with -V=1500V, without -V=1000V
Maximum series fuse rating				25A	
Power measurement tolerance				±3%	
Temperature coefficients of Pmax				-0.30%/°C	
Temperature coefficients of Voc				-0.25%/°C	
Temperature coefficients of Isc				0.046%/°C	
Nominal operating cell temperature (NOCT)				45±2°C	

*STC: Irradiance 1000W/m²

Cell Temperature 25°C

AM=1.5

NOCT: Irradiance 800W/m²

Ambient Temperature 20°C

AM=1.5

Wind Speed 1m/s