

Hi-MO X10

LR7-54HVD (Transparent Design)

465~495M

**Bifacial
Power Generation**



Advanced:

High efficiency with better energy generation.



Value-Added:

Better bifacial performance, gain amplified returns.



Safe:

Anti-shading & TaiRay wafers ensure ultimate safety.



Aesthetic:

Gridless aesthetics adapts to diverse settings.



25-year Warranty for
Materials and Processing



30-year Warranty for
Extra Linear Power Output

Complete System and Product Certifications


IEC 61215, IEC 61730

IEC62941: Guideline for module design qualification and type approval

ISO9001: Quality Management System

ISO14001: Environment Management System

ISO45001: Occupational Health and Safety

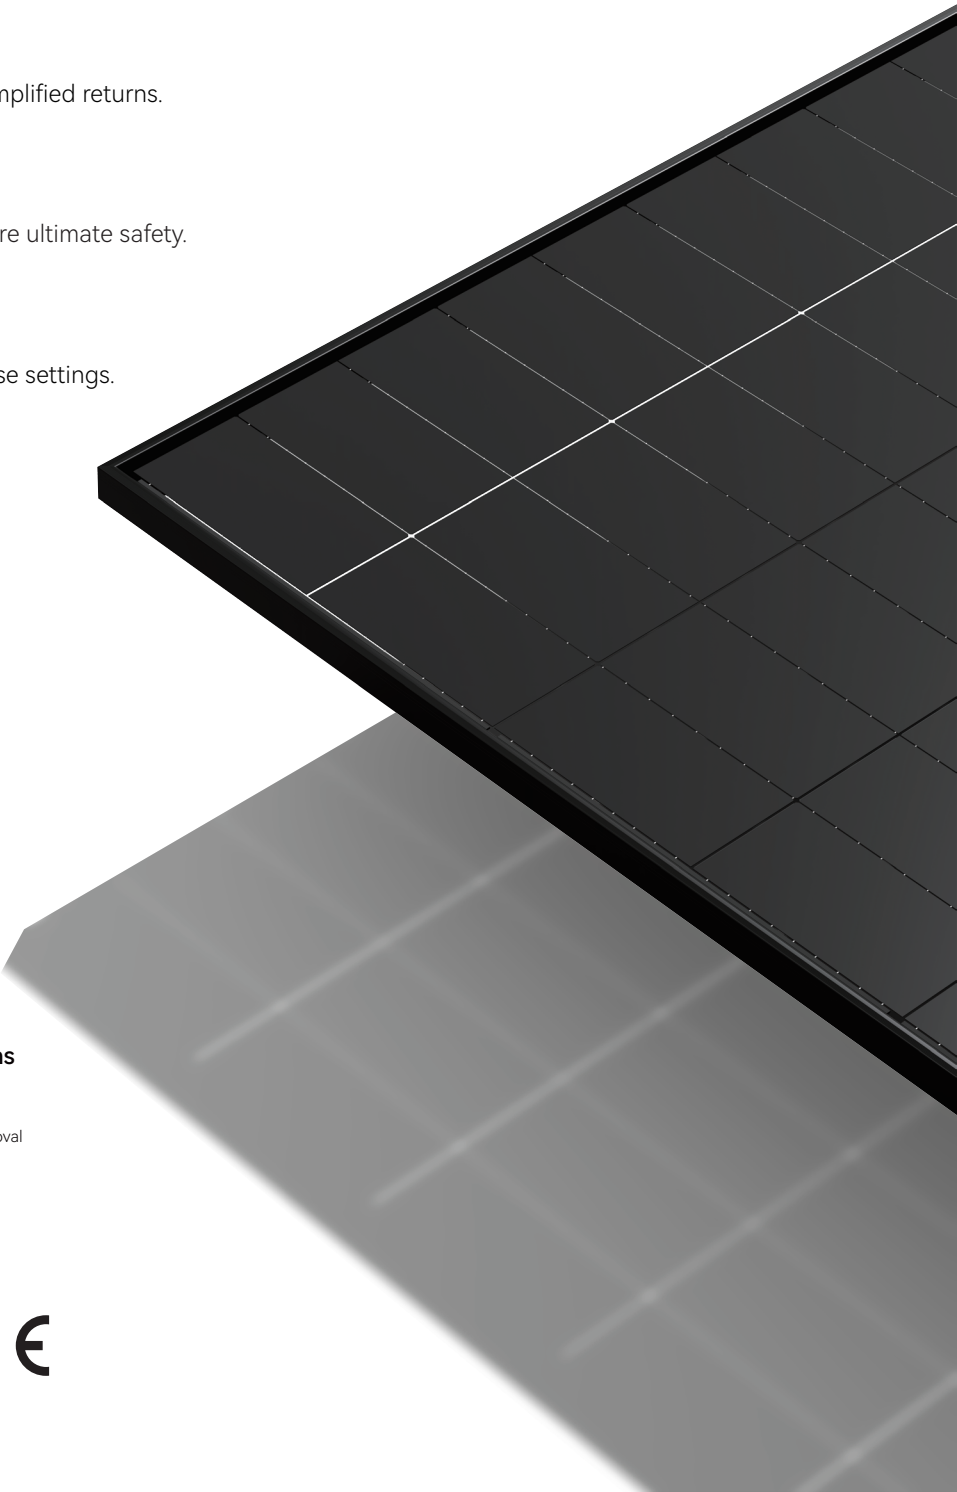

24.25%

MAX MODULE
EFFICIENCY

0~3%

POWER
TOLERANCE

1%

FIRST YEAR
POWER DEGRADATION

0.35%



YEAR 2-30
POWER DEGRADATION

BC-CELL

LOWER OPERATING
TEMPERATURE


Additional Value

30-Year Power Warranty

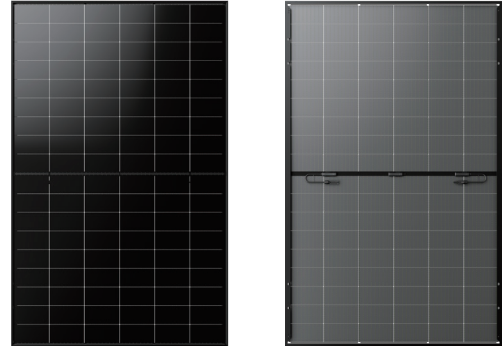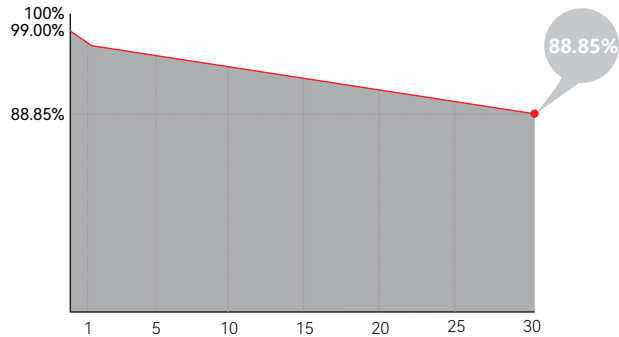

Mechanical Parameters

Cell Orientation	108 (6×18)
Junction Box	IP68
Output Cable	4mm ² ;+400/-200mm/±1200mm length can be customized
Glass	Double glass 2.0mm semi-tempered glass+1.6mm semi-tempered glass
Frame	Black anodized aluminum alloy frame
Weight	23.5 kg
Dimension	1800×1134×30mm
Packaging	36pcs per pallet / 216pcs per 20'GP / 864pcs per 40'HC
Connector	EVO2A(Staubli) or PV-LR5(LONGi)

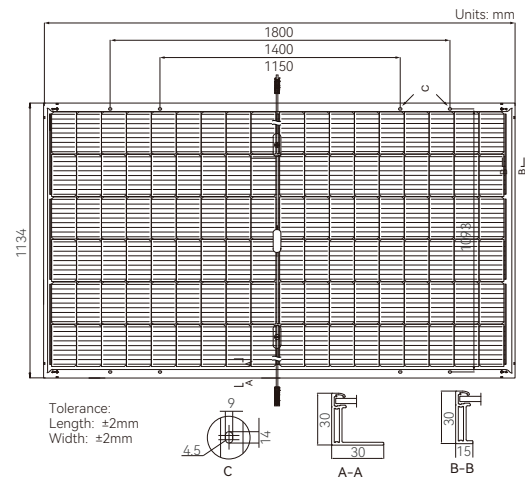

Electrical Characteristics

STC : AM1.5 1000W/m² 25°C

Test uncertainty for Pmax: +3%

Module Type	LR7-54HVD-465M	LR7-54HVD-470M	LR7-54HVD-475M	LR7-54HVD-480M	LR7-54HVD-485M	LR7-54HVD-490M	LR7-54HVD-495M
Testing Condition	STC	STC	STC	STC	STC	STC	STC
Maximum Power (Pmax/W)	465	470	475	480	485	490	495
Open Circuit Voltage (Voc/V)	40.20	40.31	40.42	40.53	40.64	40.75	40.86
Short Circuit Current (Isc/A)	14.68	14.78	14.88	14.98	15.08	15.18	15.28
Voltage at Maximum Power (Vmp/V)	33.18	33.29	33.40	33.51	33.62	33.73	33.84
Current at Maximum Power (Imp/A)	14.02	14.13	14.23	14.33	14.43	14.53	14.63
Module Efficiency(%)	22.78	23.03	23.27	23.52	23.76	24.01	24.25

Operating Parameters

Operational Temperature	-40°C ~ +85°C
Power Binning Tolerance	0~3%
Power Measurement Tolerance	±3%
Voc & Isc Measurement Tolerance	±5%
Maximum System Voltage	DC1500V (IEC)
Maximum Series Fuse Rating	30A
Nominal Operating Cell Temperature	45±2°C
Protection Class	Class II
Bifaciality	70±5%
Fire Rating	IEC Class C

Mechanical Loading

Front Side Maximum Static Loading	5400Pa
Rear Side Maximum Static Loading	2400Pa
Hailstone Test	25mm Hailstone at the speed of 23m/s

Temperature Ratings (STC)

Temperature Coefficient of Isc	+0.050%/°C
Temperature Coefficient of Voc	-0.200%/°C
Temperature Coefficient of Pmax	-0.260%/°C

Importer: LONGi Solar Australia Pty Ltd
Add: Level 17, 570 George Street, Sydney NSW 2000
Tel: 1800 328 888
Email: au@longi.com
ABN: 15 632 322 288
Website: www.longi.com/au

Manufacturer: LONGi Green Energy Technology Co.,Ltd.
Add: No.388,Middle Hangtian Road, Chang'an District,
Xi'an, Shaanxi 710100,P.R.China.
Website: www.longi.com
Tel: (+86) 400-860-1012
Email: market@longi.com