


Everest G12R Series 600-635W

132-cell Bifacial HJT Half Cell
Double-glass Solar Module



HJT-0BB Technology

Better current collection, better low-light performance, and higher power generation.



Sealing with PIB

Stronger moisture resistance, greater air impermeability to extend module lifespan.



Full Scenarios Coverage

Suitable for all scenario, especially C&I, residential, and ground applications, lower BOS cost, lower LCOE.



*Refer to (Limited Warranty for Heterojunction Photovoltaic Modules)

Complete System and Product Certifications:

IEC61215, IEC61730


ISO9001: 2015 Quality Management System

ISO14001: 2015 Environment Management System

ISO45001: 2018 Occupational Health and Safety

IEC62941: 2019 Terrestrial Photovoltaic (PV) Modules-quality System for PV Module Manufacturing

IEC/TS62994: 2019 Photovoltaic (PV) Modules Through the Life Cycle-environmental Health and Safety (EH&S) Risk Assessment-general Principles and Nomenclature

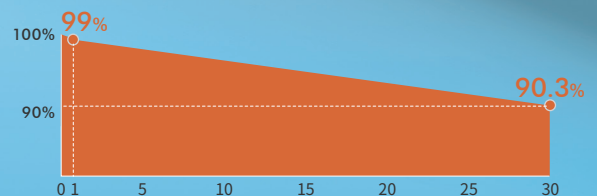

* First year power degradation $\leq 1\%$
 * Annual power degradation (2-30 year) $\leq 0.3\%$
 * Power output until the 30th year $\geq 90.3\%$


HSN-210R-B132 600-635W

132-Half-Cell Bifacial HJT Module

- BloombergNEF Tier 1 PV module manufacturer
- Reinsurance underwritten by Ariel Re


Engineering Drawings

Unit: mm

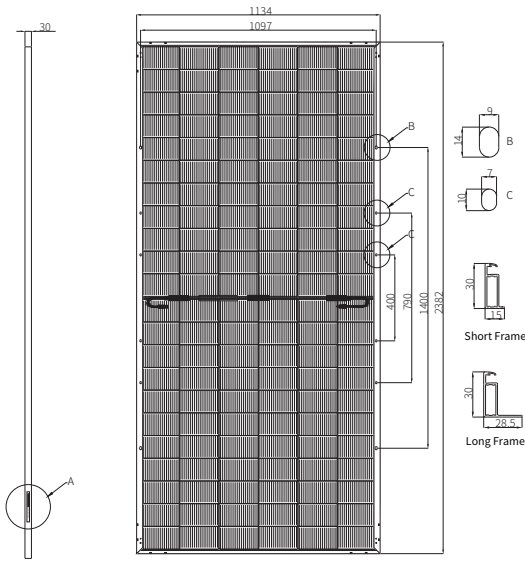

I-V Curve

(HSN-210R-B132DS620)

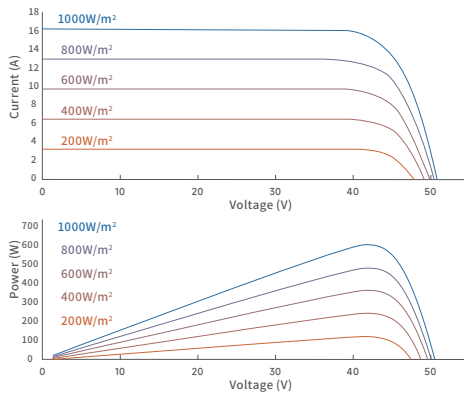

Temperature Characteristics

Temperature Coefficient of Pmax	-0.24%/°C
Temperature Coefficient of Voc	-0.22%/°C
Temperature Coefficient of Isc	+0.04%/°C

Operating Conditions

Nominal Operating Cell Temp.	44±2°C
Operating Temperature	-40~+85°C
Maximum System Voltage	DC1500V (IEC)
Maximum Series Fuse Rating	30A
Tolerance of Pmax	0~+3%
Power Selection	0~+5W
Bifacial Gain	10~15%
Bifaciality coefficient of Pmax	90±5%
Bifaciality coefficient of Voc	95~100%
Bifaciality coefficient of Isc	90±5%
Safety Class	Class II
Fire Safety Class	Class C according to UL790

Mechanical Characteristics

Cell Type	HJT
No. of Cells	132 (6x22)
Dimensions	2382 x 1134 x 30 mm
Weight	32.6kg
Junction Box	IP68
Cable	4mm ² ; +350/-250mm or customized; UV resistant
Connector	MC4 / MC4-Evo2 / MC4-Evo2A / PV-H4 / Z4S-abcd / PV-ZH202B
Connector Manufacturer	Stäubli/huayu/Zerun/Zhonghuan
Frame	Anodized aluminum alloy frame
Max Static Load (front side/rear side)	5400Pa / 2400Pa
Glass	Dual glass, 2.0mm

Electrical Characteristics

STC

HSN-210R-B132	DS600	DS605	DS610	DS615	DS620	DS625	DS630	DS635
Maximum Power (Pmax/W)	600	605	610	615	620	625	630	635
Module Efficiency (%)	22.2	22.4	22.6	22.8	23.0	23.1	23.3	23.5
Voltage at Pmax (Vmp/V)	40.69	40.78	40.85	40.96	41.05	41.14	41.23	41.32
Current at Pmax (Imp/A)	14.76	14.85	14.95	15.03	15.12	15.21	15.30	15.39
Open Circuit Voltage (Voc/V)	48.75	48.85	48.94	49.05	49.15	49.25	49.34	49.43
Short Circuit Current (Isc/A)	15.56	15.66	15.76	15.86	15.96	16.06	16.16	16.26

STC: AM1.5, 1000W/m², 25°C.

BNPI

Maximum Power (Pmax/W)	672	678	684	689	695	700	706	712
Voltage at Pmax (Vmp/V)	40.83	40.92	40.99	41.10	41.19	41.28	41.37	41.46
Current at Pmax (Imp/A)	16.48	16.58	16.69	16.78	16.88	16.98	17.08	17.18
Open Circuit Voltage (Voc/V)	48.92	49.02	49.11	49.22	49.32	49.42	49.51	49.60
Short Circuit Current (Isc/A)	17.45	17.56	17.67	17.79	17.90	18.01	18.12	18.24

BNPI: AM1.5, 1000W/m², 135W/m², 25°C.

NOCT

Maximum Power (Pmax/W)	458	461	465	469	473	477	481	484
Module Voltage at Pmax (Vmp/V)	38.84	38.92	38.98	39.09	39.18	39.26	39.34	39.42
Current at Pmax (Imp/A)	11.80	11.87	11.95	12.01	12.08	12.16	12.23	12.30
Open Circuit Voltage (Voc/V)	46.53	46.62	46.71	46.82	46.91	47.01	47.09	47.18
Short Circuit Current (Isc/A)	12.44	12.52	12.60	12.68	12.76	12.84	12.92	13.00

NOCT: AM1.5, 800W/m², 20°C, 1m/s.

Packaging

	40HQ
Modules Per Pallet	36
Pallets Per Container	20
Modules Per Container	720



ANHUI HUASUN ENERGY CO., LTD. All rights reserved © 2020-2024

Products are manufactured in China.

NO.99 Qingliu Road, Economic and Technological Development Zone, Xuancheng, Anhui, China
 Tel: 0086-563-3318095 www.huasunsolar.com
 sales@huasunsolar.com customerservice@huasunsolar.com

With the development of technology and the iterative updating of products, the technical specification of products released by HUASUN in the future may differ from those listed in this datasheet. HUASUN reserves the right to change the technical specification of the products at any time without prior notice, and the technical specification of the products ordered by the customers are subject to the technical specification agreed upon in the legally binding contract signed by both parties. The final interpretation of the datasheet is reserved by HUASUN.